„CORMIS“

KORROSIONSSCHUTZSYSTEM

Datenblatt

EIGENSCHAFTEN CORMIS 4

- Gehäuse aus PVC
- Verrohrungen: DN40 - PN16
- 4 Probenhalter
- Probenhalter ohne Werkzeug ausziehbar
- Gesamtabmessungen: 600 mm x 900 mm
- Absperrventile für Einlass/Auslass
- Durchflussmesser
- Y-Filter (Option)
- Auslassventil
- Temperatur: max. 40 °C (104 °F)

EIGENSCHAFTEN CORMIS 3

- Gehäuse aus PVC
- Verrohrungen: DN40 - PN16
- 3 Probenhalter
- Probenhalter ohne Werkzeug ausziehbar
- Gesamtabmessungen: 600 mm x 900 mm
- Absperrventile für Einlass/Auslass
- Durchflussmesser
- Y-Filter (Option)
- Auslassventil
- Temperatur: max. 40 °C (104 °F)

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R2025

emec
SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0

„CORMIS“

KORROSIONSSCHUTZSYSTEM

Datenblatt

CORMIS 4

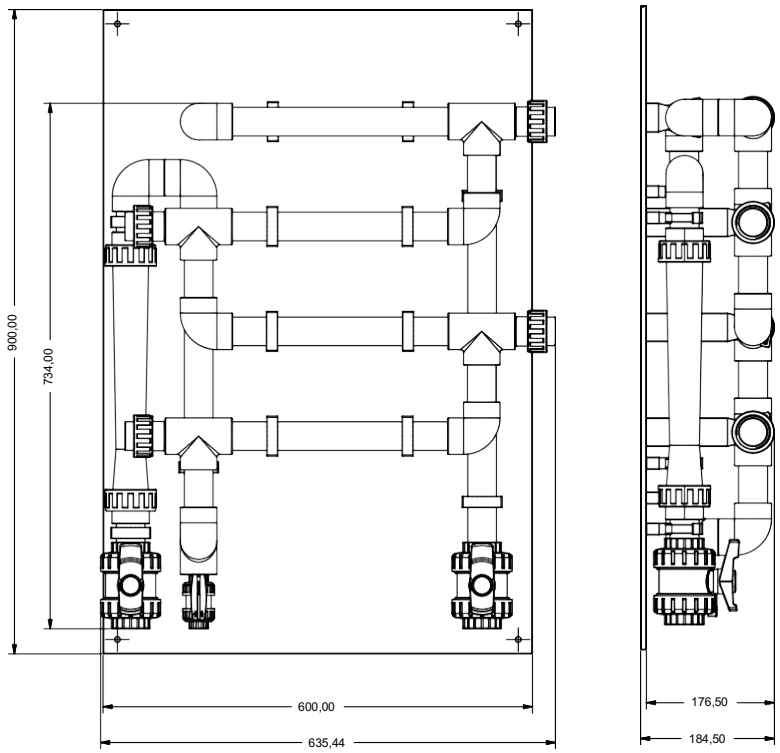

CORMIS 3

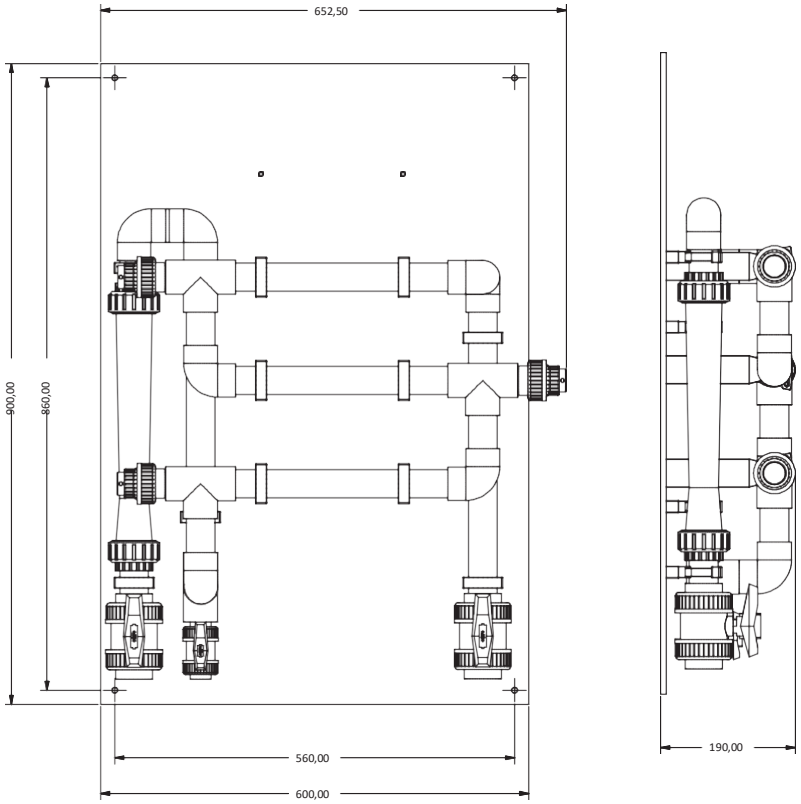

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R2025

emec
SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0