"CORMIS"

Data Sheet

SISTEMA DI CONTROLLO DELLA CORROSIONE

CARATTERISTICHE CORMIS 4

- Corpo in PVC
- Tubazioni: DN40 - PN16
- 4 porta provini
- Porta provini estraibili senza alcuno strumento
- Dimensioni di ingombro: 600 mm x 900 mm
- Valvole di isolamento ingresso / uscita
- Flussimetro
- Filtro a Y (opzione)
- Valvola di scarico
- Temperatura: max 40°C (104°F)

CARATTERISTICHE CORMIS 3

- Corpo in PVC
- Tubazioni: DN40 - PN16
- 3 porta provini
- Porta provini estraibili senza alcuno strumento
- Dimensioni di ingombro: 600 mm x 900 mm
- Valvole di isolamento ingresso / uscita
- Flussimetro
- Filtro a Y (opzione)
- Valvola di scarico
- Temperatura: max 40°C (104°F)

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R2025

emec
SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0

"CORMIS"

Data Sheet

SISTEMA DI CONTROLLO DELLA CORROSIONE

CORMIS 4

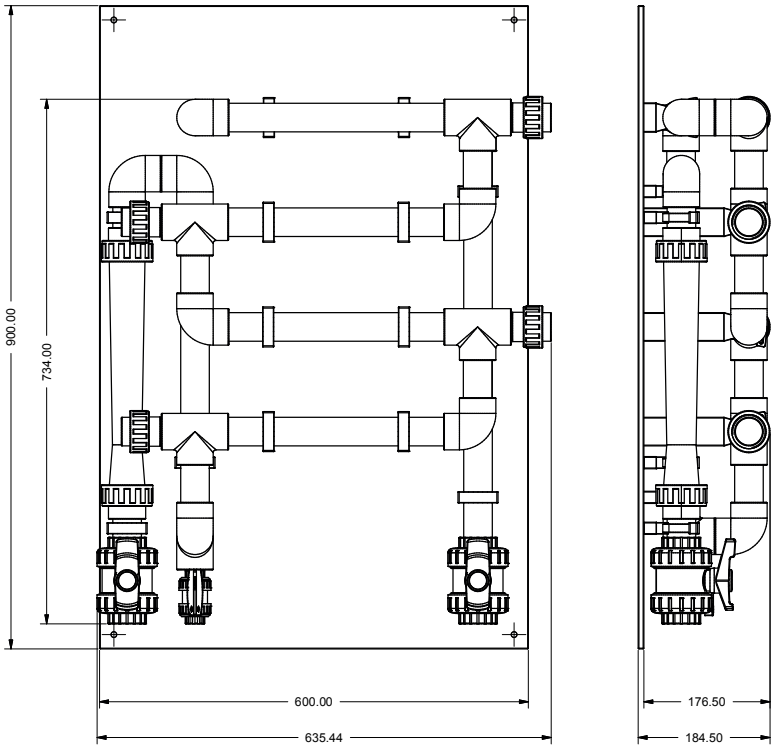

CORMIS 3

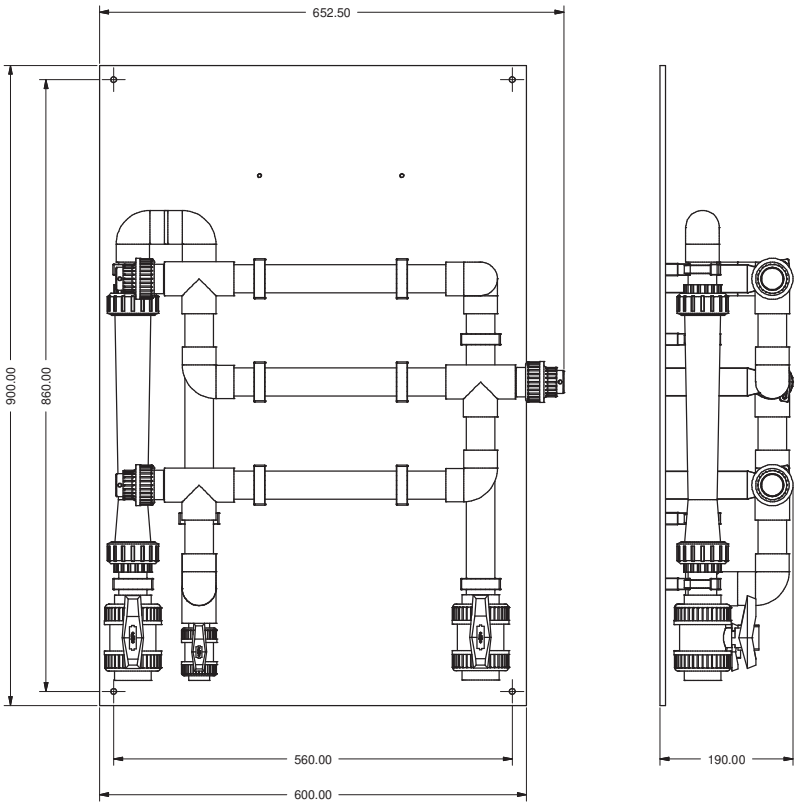

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R2025

emec SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM

qualityaustria SYSTEM CERTIFIED

ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0