


FEATURES

- Suction lances for PRIUS pump from 250 to 500 l/h
- Level switch
- N.O. contact
- BNC connector
- Foot valve
- Adjustable height
- 1 1/2" fitting
- 1 1/1" foot filter
- PVC body
- Up to 2 suction input available



1 suction input



2 suction input



SPECIFICATIONS

L A S P M V 0 7 5 5 1 U 0 3 , 5 5 0 0 0

INPUTS (suction)	
1	1
2	2

LEVEL - CONTACT - CONNECTOR	
0	Level - N.O. contact - BNC
4	without level



FITTING AND HOSE	
5	3/4" D.13
B	3/4" D.18
M	D.32

LENGTH cm	
075	75
108	108
122	122



O-RING	
V	FKM B
D	Ethylene Propylene

DIMENSIONS

OPERATING LENGHT	TANK VOLUME
75 cm	250 lt (mod. CNT PD 250)
108 cm	500 lt (mod. CNT PD 500)
122 CM	1000 lt (mod. CNT PD 1000)

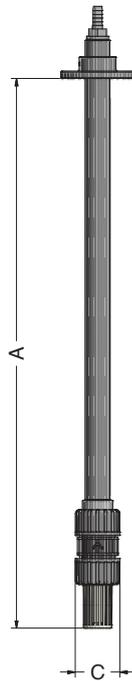

LASPM 1		
A (mm)	B	C
750	100	60
1080		
1220		

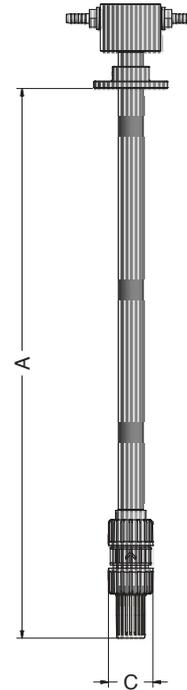

LASPM 2		
A	B	C
750	100	60
1080		
1220		